MITICO

LG

MD

SM

DESCRIZIONE:

Proiettore in alluminio orientabile, da binario e superficie. Sorgente LED con driver incorporato, disponibile dimmerabile, food e DALI

Proiettore in alluminio orientabile, da binario e superficie. Sorgente LED con driver incorporato.

Proiettore in alluminio orientabile, da binario e superficie. Sorgente LED con driver incorporato.

DESCRIPTION:

Adjustable aluminium projector for track and surface. LED source with driver on board, available dimm, food and DALI

Adjustable aluminium projector for track and surface. LED source with driver on board

Adjustable aluminium projector for track and surface. LED source with driver on board

DIMENSIONI:

DIMENSIONS:

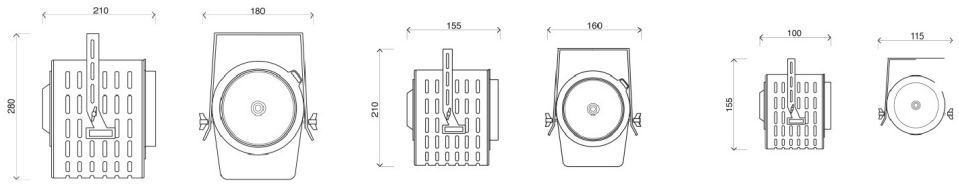

FINITURE:

Alluminio e ferro naturale, alluminio e bianco, alluminio e nero.

Alluminio e ferro naturale, alluminio e bianco, alluminio e nero.

Alluminio e ferro naturale, alluminio e bianco, alluminio e nero.

FINISHES:

Aluminum and natural iron, aluminium and white, aluminium and black.

Aluminum and natural iron, aluminium and white, aluminium and black.

Aluminum and natural iron, aluminium and white, aluminium and black.

Caratteristiche tecniche/Technical data

Code	LG2 - LG3 - LG4 - LG5	MD 2 - MD3 - MD 4	SM8 - SM12
Flux lm	2300 / 3300 / 4000 / 5400	2300 / 3300 / 4000	805 / 1200
Kelvin	3000K/4000K	3000k/4000K	3000k/4000K
Beam	16° - 38° - 50°	16° - 38° - 50°	14° - 34°
Int. protection	IP20	IP20	IP20
Energy efficiency	A++	A++	A++
CRI	85	85	80

MITICO

	PAR 38	PAR 30	PAR 16
DESCRIZIONE:	Proiettore in alluminio orientabile, da binario e superficie. Sorgente LED 230V E27, disponibile DALI Non necessita di alimentatore.	Proiettore in alluminio orientabile, da binario e superficie. Sorgente LED 230V E27, disponibile LED spot o DALI Non necessita di alimentatore.	Proiettore in alluminio orientabile, da binario e superficie. Sorgente LED 230V GU10. Non necessita di alimentatore.
DESCRIPTION:	Adjustable aluminium projector for track and surface. LED source 230V E27. No power supply needed. Available for DALI	Adjustable aluminium projector for track and surface. LED source 230V E27. No power supply needed. Available for LED spot or DALI	Adjustable aluminium projector for track and surface. LED source 230V GU10. No power supply needed.
DIMENSIONI: **DIMENSIONS:**	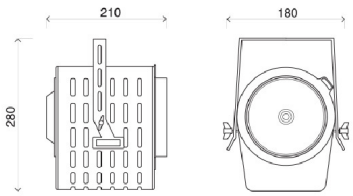		
FINITURE: **FINISHES:**	Alluminio naturale, nero opaco, bianco opaco. Natural aluminum, matte black, matte white.	Alluminio naturale, nero opaco, bianco opaco. Natural aluminum, matte black, matte white.	Alluminio naturale, nero opaco, bianco opaco. Natural aluminum, matte black, matte white.
LAMPADINA: **BULB:**	LED PAR 38	LED PAR 30	LED GU10

Caratteristiche tecniche lampadina/ Bulb technical data

Code	PAR38	PAR30	PAR16
Max Power	20W LED	17 W LED	10,5W LED
Dimensions	h135xØ121 mm	h96xØ92 mm	h58x Ø49,6 mm
Int. protection	IP20	IP20	IP20

DASA
LIGHT YOUR LIFE